

### H-GTSEN3 Wiring Diagram

Part Number: H-GTSEN3  
Connector Part Number: N/A  
Drawing Revision 2 - 30/8/2017



[www.youtube.com/efihardware](http://www.youtube.com/efihardware)



[www.facebook.com/efihardware](http://www.facebook.com/efihardware)



[www.efihardware.com](http://www.efihardware.com)



[info@efihardware.com](mailto:info@efihardware.com)



(03) 9873 5400  
+613 9873 5400



(03) 9873 5955  
+613 9873 5955

**BROWN: +5V to +24V Supply**

**BLACK: Output Signal**


**BLUE: Ground**

**NOTE:**


The H-GTSEN3 Sensor pulls the Output Signal wire to ground when a ferrous material is at the sensor face.

The H-GTSEN3 Sensor releases the Output Sensor wire when there is no ferrous material at the sensor face.

Recommended Pullup Resistor Vs Supply Voltage:  
DC Volts: 5V 9V 12V 15V 24V  
Ohms: 1k 1.8k 2.4k 3k 3k

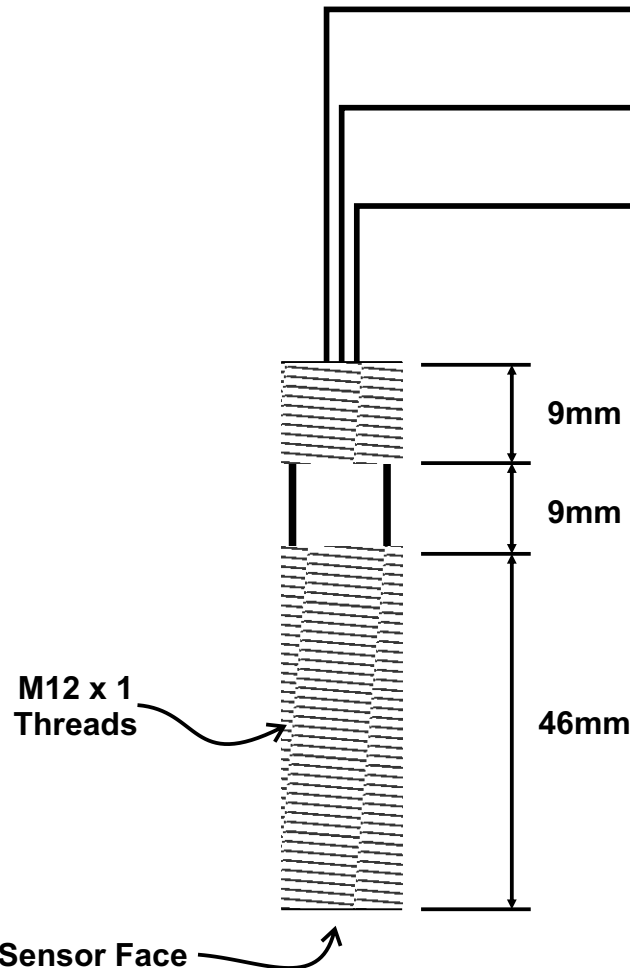

#### RECOMMENDED TOOTH CONFIGURATION

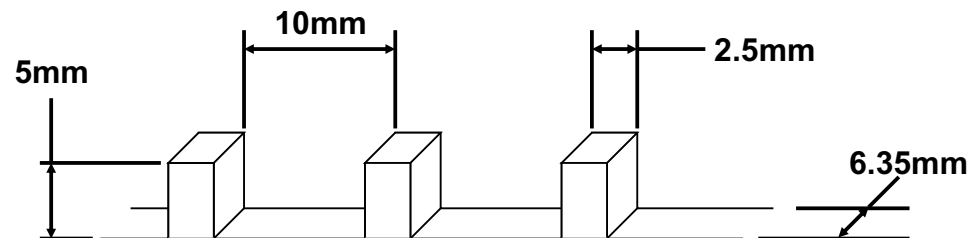

**NOTE:**

Recommended Sensor / Tooth Air Gap: 1.5mm  
Recommended Tooth Height: 5mm  
Recommended Tooth Spacing: 10mm  
Recommended Tooth Width: 2.5mm  
Recommended Tooth Thickness: 6.35mm